
Transistors

Switching (450V, 7A) 25к2299N

Features

- 1) Low on-resistance.
- 2) Fast switching speed.
- 3) Wide SOA (safe operating area).
- 4) Gate-source voltage (V_{GSS}) guaranteed to be ± 30 V.
- 5) Easily designed drive circuits.
- 6) Easy to parallel.

Structure
 Silicon N-channel
 MOSFET

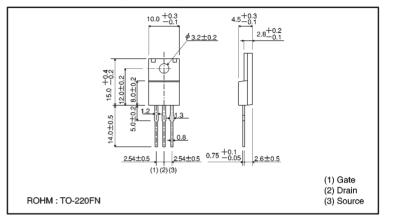

External dimensions (Units: mm)

•Absolute maximum ratings (Ta = 25° C)

Parameter		Symbol	Limits	Unit
Drain-source voltage		Voss	450	V
Gate-source voltage		Vgss	±30	V
Drein europh	Continuous	lo	7	А
Drain current	Pulsed	DP*	28	А
Reverse drain current	Continuous	Idr	7	А
	Pulsed	Idrp*	28	А
Total power dissipation (Tc=25°C)		Po	30	W
Channel temperature		Tch	150	ĉ
Storage temperature		Tstg	-55~+150	ĉ

* $Pw \leq 10 \mu s$, Duty cycle $\leq 1\%$

Packaging specifications


	Package	Bulk
Туре	Code	—
	Basic ordering unit (pieces)	500
2SK2299N		\bigcirc

Electrical characteristics (Ta = 25°C)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Conditions
Gate-source leakage	lass	_	_	±100	nA	$V_{GS}=\pm 30V, V_{DS}=0V$
Drain-source breakdown voltage	V(BR)DSS	450	_	_	V	ID=1mA, VGS=0V
Zero gate voltage drain current	loss	_	_	100	μΑ	VDs=450V, VGs=0V
Gate threshold voltage	VGS(th)	2.0	_	4.0	V	Vos=10V, Io=1mA
Static drain-source on-state resistance	RDS(on)	_	0.85	1.1	Ω	ID=4.0A, VGS=10V
Forward transfer admittance	Yfs *	3.0	5.5	_	S	ID=4.0A, VDS=10V
Input capacitance	Ciss	_	870	—	pF	Vps=10V
Output capacitance	Coss	_	180	—	pF	V _{GS} =0V
Reverse transfer capacitance	Crss	—	40	—	pF	f=1MHz
Turn-on delay time	td(on)	_	15	_	ns	ID=4A, VDD≒150V
Rise time	tr	_	18	_	ns	V _{GS} =10V
Turn-off delay time	td(off)	_	60	—	ns	R∟=37.5Ω
Fall time	tr		35	_	ns	Rg=10Ω
Reverse recovery time	trr		400	_	ns	Idr=7A, Vgs=0V
Reverse recovery charge	Qrr	_	2.5	_	μC	di/dt=100A/ µs


* Pw≦300 μs, Duty cycle≦1%

Electrical characteristic curves












Transistors

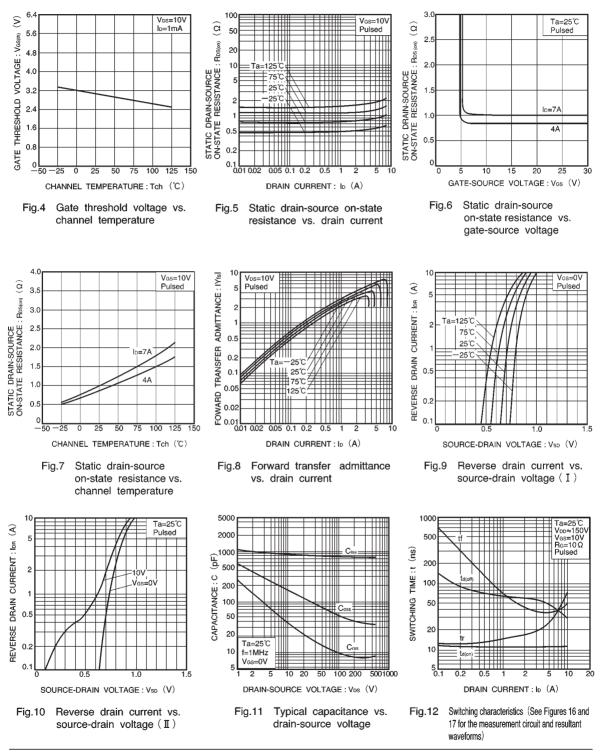


канп

-O Vds

≷rι

Vdd

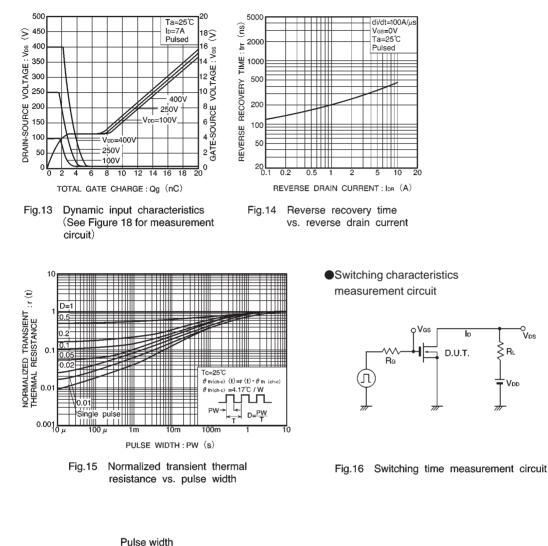




Fig.17 Switching time waveforms




Fig.18 Gate charge measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.

• Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.

Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.

• Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by

- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
 Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.