


MODEL NUMBER
ADT-2673-BF-SMF-02


NOTES:

- 1.0 MATERIALS:
 - 1.1 CENTRAL HOUSING & SMA HOUSING: STAINLESS STEEL PER ASTM-A582, TYPE 303.
 - 1.2 BNC HOUSING: BRASS PER ASTM B16
 - 1.3 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
 - 1.4 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
 - 2.1 CENTRAL HOUSING & SMA HOUSING: PASSIVATED PER MIL-F-14072 AND QQ-P-35.
 - 2.2 BNC HOUSING: NICKEL PER QQ-N-290
 - 2.3 CENTER CONTACT: GOLD PER MIL-G-45204 TYPE II, CLASS 2.
- 3.0 ELECTRICAL SPECIFICATIONS:
 - 3.1 FREQUENCY RANGE: DC to 8.0 GHz.
 - 3.2 VSWR (MAX):
 - DC to 4.0 GHz; 1.15:1
 - 4.0 to 8.0 GHz; 1.25:1
 - 3.3 IMPEDANCE: 50 OHMS
- 4.0 MARKING: MARK UNIT AS SHOWN (REF: INK-04391-27-02)
- 5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

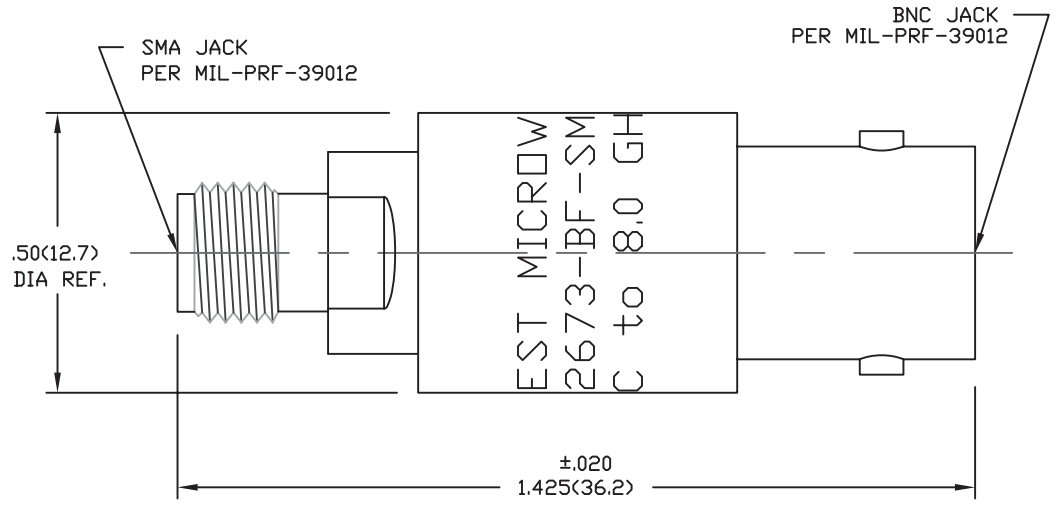

DWG NO. WAS: 04013-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/3/82
A	ECR 1739	10/12/82
B	ECR 6545	7/10/88
B1	UPDATE MOD. NO	8/4/92
C	CAD/UPDATE SPECS & MARKING	12/14/92
C1	ADDED TITLEBLOCK	3/15/05

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:</p> <p>3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'</p>	<p>CAGE CODE 34078</p>		<p>MIDWEST MICROWAVE</p>	
			<p>TITLE ADAPTER SMA JACK TO BNC JACK OUTLINE DRAWING</p>	
	<p>DRAWN/DATE A.BEATTY 12/14/92</p>	<p>ENG./DATE A.OSGA 12/17/92</p>	<p>DRAWING NUMBER ADT-2673-BF-SMF-02-01</p>	<p>REV. C1</p>
	<p>CHECKED/DATE M.HOLLMAN 12/16/92</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5=1</p>	<p>SHEET 1 of 1</p>