


**PACKAGE: INDIVIDUAL PE BAG.**

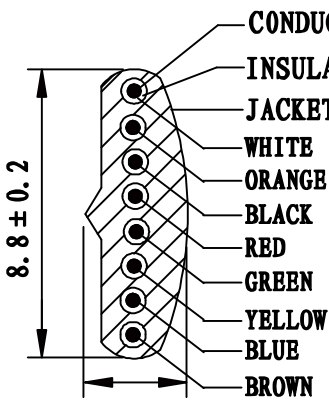


2.4 ± 0.2  
**SEC: A=A**

**CONDUCTOR: [26AWG (0.16/7) BARE COPPER] X8C**  
**INSULATION: [PP6331 ID: 0.95 ± 0.03] X8C**  
**JACKET: PVC NOUL 65P**

**NOTE FOR PLUG:**  
**MATERIAL: HOUSING-POLYCARBONATE, CLEAR.**  
**TERMINAL-0.36 [.014] THICK PHOSPHOR BRONZE.**  
**THICK GOLD IN LOCALIZED GOLD PLATE.**  
**AREA, GOLD FLASH OVER THE REMAINDER.**  
**OVER 2.54um [.000100] THICK NICKEL**  
**UNDERPLATE.**


P1	P2
1 <u>WHITE</u>	1
2 <u>ORANGE</u>	2
3 <u>BLACK</u>	3
4 <u>RED</u>	4
5 <u>GREEN</u>	5
6 <u>YELLOW</u>	6
7 <u>BLUE</u>	7
8 <u>BROWN</u>	8

NO	ITEM	DESCRIPTION	Q' TY
①	CABLE		1 PCS
②	PLUG	8P8C 50U"	2 PCS
③	CABLE TIE	Concrete such as material detail	1 PCS
④			
⑤			
⑥			



**A, B, C, D, E. Folding**

PART NO	DRAWING NO	WIRE LENTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
512-26-8800-BL-0005F	A	1525 ± 20 (5FT)	Black	BLACK LIGHT	1525-1535MM
512-26-8800-BL-0007F	B	2135 ± 30 (7FT)	Black	BLACK LIGHT	2135-2145MM
512-26-8800-BL-0010F	C	3050 ± 60 (10FT)	Black	BLACK LIGHT	3050-3060MM
512-26-8800-BL-0012F	D	3660 ± 60 (12FT)	Black	BLACK LIGHT	3660-3670MM
512-26-8800-BL-0014F	E	4270 ± 60 (14FT)	Black	BLACK LIGHT	4270-4280MM
512-26-8800-BL-0025F	F	7625 ± 100 (25FT)	Black	BLACK LIGHT	7625-7635MM
512-26-8800-BL-0050F	G	15250 ± 150 (50FT)	Black	BLACK LIGHT	15250-15260



**F, G. Folding**

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC			
Industrial Cable and Connector Technology			
IDRAWING NO:	671-323	CUSTOMER:	L-671
ITEM NO:	8C CABLE P+P PLUG	UNIT:	mm
DATE:	2012-02-20	ISSUE:	(A/0)
DRAWN:	QE:	QA:	
SALES DEPT:	SALES MANAGER:		