



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

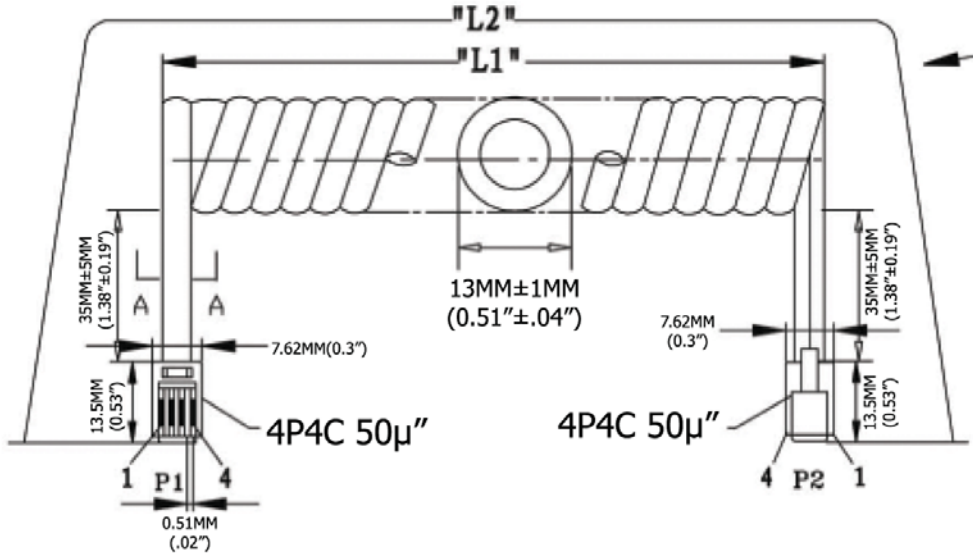

Extended length is with 500g of force

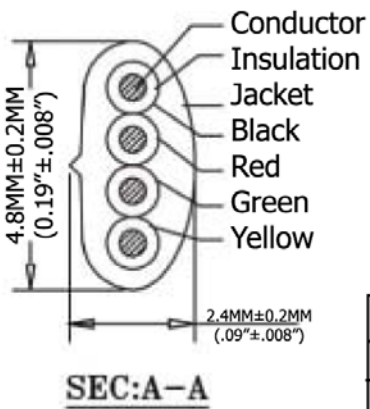

TERMINATION:

P1	P2	COLOR
1	4	BLACK
2	3	RED
3	2	GREEN
4	1	YELLOW

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36\"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ\" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	33.5 Inches
4,267.2MM-4,907.28MM	850.9MM



Scale	1:1						Name	Item No.
TOLERANCE						Drawn	11.02.11	AT-C-26-4/4/S-14
X.X	±0.40					Approved	Chappell	
X.XX	±0.25							Title NON-UL 26 AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Standard Plug, 50µ\" of contact plating, SILVER
X.XXX	±0.15							
Angle	±3°							Drawing No.
								rev00
								Replace
								Sheet
			Modification	Date	Name			