



### 4900-5850 MHZ VERTICALLY POLARIZED SECTOR ANTENNA

The vertically polarized ultra wide-band 5GHz sector antenna systems offered by Laird Technologies are constructed of UV stable ASA plastic radomes and galvanized steel brackets with stainless steel hardware for long service life in the most demanding conditions. The ultra wide-band operation allows a single antenna to cover a wide frequency range thereby allowing the operator maximum flexibility in his network. The antennas are DC Grounded for lightning/ESD protection. The heavy duty bracket system adjusts for up to 15° of downtilt.


#### FEATURES

- High-gain 16 and 17dBi in a small form factor
- Low wind loading: 160MPH survivability
- Vertically polarized, ultra wide-band operation
- Type N female integrated connector
- Galvanized steel tilt bracket for up to 3.5" dia pole

#### MARKETS


- 5.8GHz U-NII band applications
- Point-to-multi-point systems
- Base station antennas
- 802.11a applications
- Pubic safety

PARAMETER	S4901790PNF	S49016120PNF
Frequency range	4900 - 5850 MHz	4900 - 5850 MHz
VSWR	1.8:1	1.8:1
Impedance	50 ohm	50 ohm
Input power	10W	10W
Pole diameter (OD)	1.5" - 3.5" (38-89mm)	1.5" - 3.5" (38-89mm)
Operating temperature	-40 - +70°C	-40 - +70°C
Gain	17 dBi	16 dBi
Horizontal beamwidth	90°	120°
Vertical beamwidth	6°	6°
Polarization	Vertical	Vertical
Front-to-back	>25 dB	>25 dB
Cross polarization	>15 dB	>15 dB
Mechanical downtilt	15°	15°
Weight	2 lbs (1.3 kg)	2 lbs (1.3 kg)
Dimensions (L x W x H)	24.6" x 2.7" x 1.7" (625 x 69 x 43 mm)	24.6" x 2.7" x 1.7" (625 x 69 x 43 mm)

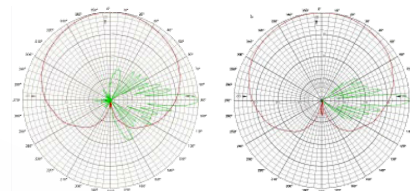


**S4901790PNF**  
**4900MHz**

**S49016120PNF**  
**4900MHz**

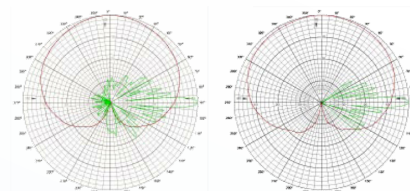

**S4901790PNF**  
**5470MHz**

**S49016120PNF**  
**5470MHz**

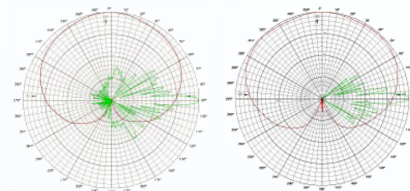

**S4901790PNF**  
**5850MHz**

**S49016120PNF**  
**5850MHz**

#### WIND LOADING

MODEL	SQ. IN	100 MPH	125 MPH
S4901xx	66.4	16.6 lb	24.9 lb

#### SYSTEM ORDERING

- S4901790PNF 4900-5850MHz 90deg 17dBi VPOL sector antenna  
 S49016120PNF 4900-5850MHz 120deg 16dBi VPOL sector antenna



ANT-DS-S4901 0809

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2009 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

global solutions: local support™

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12  
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022  
IAS-AsiaSales@lairdtech.com

www.lairdtech.com