




10/100Base-T Multi-Port Switch Module

iMcV-Switch

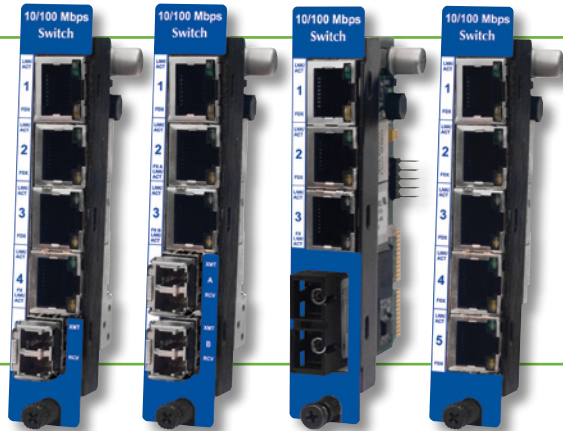


PRODUCT FEATURES

- Multi-port 10/100Base-T
- Available in multi-mode, single-mode, single-strand fiber and SFPs
- Supports up to 1000 MAC address learning
- Transparent to VLAN tags
- Grants priority for all frames with PRI>4 or DSCP>32
- Supports Auto Cross and Auto Negotiation on all copper ports
- Supports Flow Control
- Features Collision Detection

The iMcV-Switch is a multi-port, 10/100 Ethernet module that allows the user to increase port density and the service area of Ethernet networks. The store and forward switch function allows the end user to extend Ethernet service to locations for a total of 100 meters from the Ethernet source. All RJ-45 ports Auto Negotiate 10/100Base-T, half/full duplex, and automatically configure for MDI or MDIX operation. Each port allows a maximum frame size of up to 1916 bytes and supports Flow Control and priority queuing.

The iMcV-Switch is available in four different models, some offering a configuration of copper and fiber ports, copper and fiber SFP ports and an all copper port version.



iView: Windows 2000/XP/Vista/Win7

ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET CONNECTOR
iMcV-Switch *					
852-14440			100 m	5	RJ45
852-14441	SFP	1	Various	4	RJ45
852-14442	SFP	2	Various	3	RJ45
852-14443	MM850-ST	1	2 km	3	RJ45
852-14444	MM850-SC	1	2 km	3	RJ45
852-14445	MM1300-ST	1	5 km	3	RJ45
852-14446	MM1300-SC	1	5 km	3	RJ45
852-14449	SM1310/PLUS-ST	1	40 km	3	RJ45
852-14450	SM1310/PLUS-SC	1	40 km	3	RJ45
852-14451	SM1310/LONG-ST	1	80 km	3	RJ45
852-14452	SM1310/LONG-SC	1	80 km	3	RJ45
852-14453	SM1550/LONG-SC	1	80 km	3	RJ45
852-14454	SM1550/XLONG-SC	1	100 km	3	RJ45
SINGLE STRAND FIBER **					
852-14470	SSFX-SM1310-SC (1310xmt/1550rcv)	1	20 km	3	RJ45
852-14471	SSFX-SM1550-SC (1550xmt/1310rcv)	1	20 km	3	RJ45
852-14472	SSFX-SM1310/PLUS-SC (1310xmt/1550rcv)	1	40 km	3	RJ45
852-14473	SSFX-SM1550/PLUS-SC (1550xmt/1310rcv)	1	40 km	3	RJ45
852-14474	SSFX-SM1310/LONG-SC (1310xmt/1550rcv)	1	60 km	3	RJ45
852-14475	SSFX-SM1550/LONG-SC (1550xmt/1310rcv)	1	60 km	3	RJ45

* SFPs Sold Separately

** These products have single-strand fiber technology. Deploy in pairs or connect another compatible B&B IMC LLC single-strand fiber product.

10/100Base-T Multi-Port Switch Module

iMcV-Switch



SPECIFICATIONS

TECHNICAL

- IEEE 802.3x 10/100Base-T
- IEEE 802.3u Auto Negotiation
- RFC-2474 and RFC-2475 DiffServ/ToS
- Includes diagnostic LEDs
- AutoCross and Auto Negotiation on all ports
- Maximum 1916 byte packet size
- Supports Half and Full-Duplex operation
- Connectors: RJ-45 and SC, ST, LC or SFP
- Installs in any iMediaChassis, MediaChassis or IE-MediaChassis
- Supports GUI-Based iView²
- Supports Half- and Full-Duplex operation
- Includes diagnostic LEDs
- Includes hot-swappable architecture

MECHANICAL

- Dimensions 4.19"H x 0.78"W x 2.75"D
(10.74 x 2 x 7.05 cm)
- Shipping Weight 0.30 lbs (.11 kg)

ENVIRONMENTAL

- Operating Temperature: +32° to +122° F (0° to +50° C)
- Storage Temperature: -4° to +158° F (-20° to +70° C)
- Operating Humidity 5% to 95% (non-condensing),
0 – 10,000 ft. altitude

REGULATORY APPROVALS

- FCC Class B
- UL/cUL
- CE

MECHANICAL DIAGRAM

(dimensions in inches)

