

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	6.60 - 7.50 mm
Matching parts	
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	SA/Z*: Straight plug, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief
Keying	3 key (alpha=50, plug: female contacts, receptacle: male contacts)
Housing Material	
Cable Fixing	∅ 6.6 - 7.5 mm
Variant	NZ : Black collet nut for bend relief

Performance

Configuration	
Insulator	
Rated Current	3.0 Amps


Specifications

Test voltage (kV rms) Contact-contact:	1.30
Air clearance min. (mm) or Creepage distance min. (mm):	0.8

Others

DRAWINGS

Draws

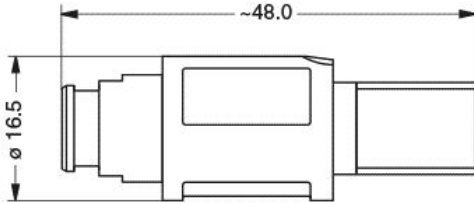

Dimensions

	A	L
mm.	16.5	48
in.	0,65	1,89

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V
Crimp settings: AWG/Selector = 28-30-32/4-3-3
Positionner: SOE.050.VM
Replacement contact: SLN.605.ZZM

Cables