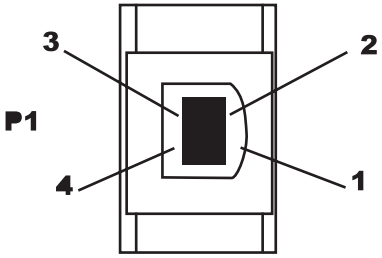

USB B Female



USB A Male

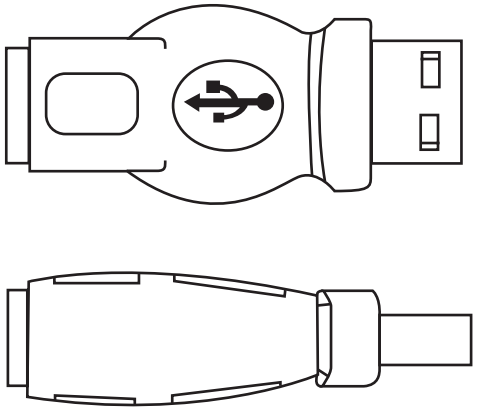

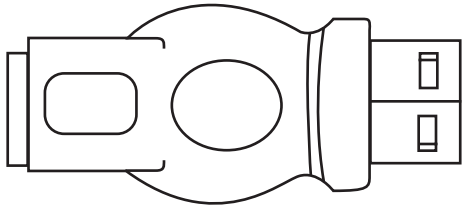

PIN Out

(P1)	(P2)
1	1
2	2
3	3
4	4
Shell	Shell

Remark:

1.Hook Up Wire:Non-UL 26AWG
2.Connector: P1: USB B Female Gold Flash Contact; Nickel Plated Shell
Plastic:White
P2: USB A Male Gold Flash Contact; Nickel Plated Shell
Plastic: White
3.Hood: Molded Type PVC 45P Color: Beige(NK-A03)
4.Test Required: A.100% Open Short & Mis Wire Test
B. Contact Resistance 3 Ohm Max
C. Insulation Resistance 20m Ohm min
5.Packing:See P-0039 Rev. C Packing Drawing EAN-Code:4016032066880

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
A-USB-3-R

Title
USB Adapter - B type Female <=> A type Male
Version 1.1 & 2.0

Drawing No.

rev00

Replace

Sheet