



THIS DRAWING IS A CONTROLLED DOCUMENT
REV: 12
1907129

USED ON

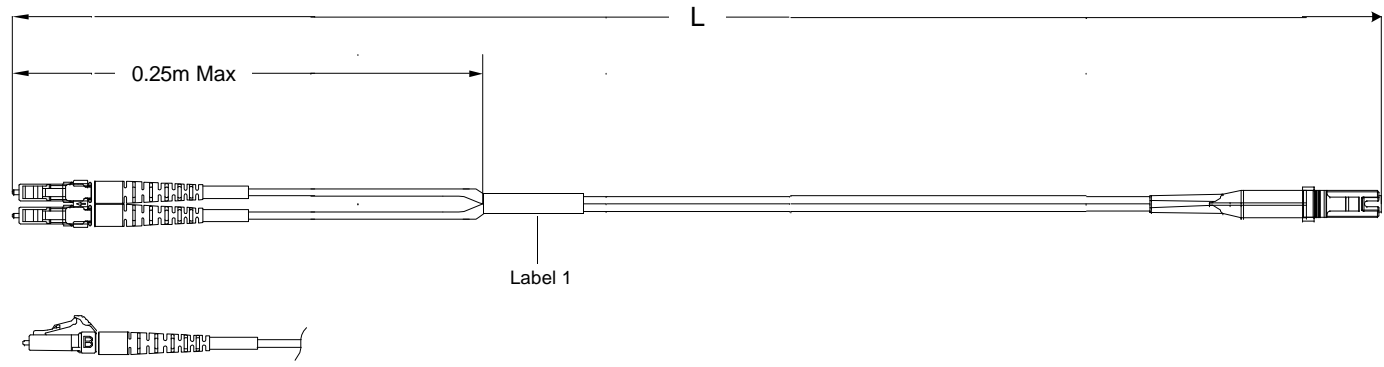


Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Rose
 Geom. Spec: N/A

Fiber Path
 A - - Fiber B
 B - - Fiber A

Notes:
 2 Includes dust caps (not shown on print).

Right Side
 Connector(s): MT-RJ (No Pins)
 Mode: MM
 Housing Color: Black
 Geom. Spec: 115-1215



VIEW D-D
 NOT TO SCALE

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSONS OR ORGANIZATIONS WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	
CE	
DIST	
16	

A	Rev Per EC#	RELEASE	1/20/2010	-	JS		
P	LTR	REVISION RECORD	DATE	DIN	APVD		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
meters	
	0 PLC ± .
	1 PLC ± .
	2 PLC ± .
	3 PLC ± .
	4 PLC ± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	Jeff Shipe	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	Jeff Shipe				
NAME	FO C/A - 2 fiber, 62.5/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1907129
SHEET	1 of 4	REV	A		

THIS DRAWING IS A CONTROLLED DOCUMENT. B6C-ND


Part #	L (meters)	L (feet)	LC-Duplex Secure, Rose		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1907129-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	20
0-1907129-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	20
0-1907129-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	20
0-1907129-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	20
0-1907129-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	20
0-1907129-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	20
0-1907129-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	20
0-1907129-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	20
0-1907129-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	20
1-1907129-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	20
1-1907129-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	20
1-1907129-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	20
1-1907129-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	20
1-1907129-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	20
1-1907129-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	20
1-1907129-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	20
1-1907129-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	20
1-1907129-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	20
1-1907129-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	20
2-1907129-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	20
2-1907129-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	20
2-1907129-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	20
2-1907129-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	20
2-1907129-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	20
2-1907129-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	20
2-1907129-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	20
2-1907129-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	20
2-1907129-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	20
2-1907129-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	20
3-1907129-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	20
3-1907129-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	20
3-1907129-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	20
3-1907129-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	20
3-1907129-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	20
3-1907129-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	20
3-1907129-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	20
3-1907129-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	20
3-1907129-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	20
3-1907129-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	20
4-1907129-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	20
4-1907129-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	20
4-1907129-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	20

Qty	U of M	Description	Item No.
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	14
1	piece	HOUSING, CONN, MT-RJ,BLACK	13
1	piece	SPRING, MT-RJ, 3.8 DESIGN	12
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	11
1	piece	PIN KEEPER, 3.8MM	10
AR	meter	2 fiber, 62.5/125, 1.8 mm, Twinzip, Orange, OFNP (Plenum)	9
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	8
1	piece	CRIMP EYELET, MT-RJ	7
1	piece	LC Duplex clip, black	6
2	piece	Eyelet/Shrink tube assembly - White	5
1	piece	DUST COVER, MT-RJ	4
1	piece	Trace Label	3
2	piece	LC, SC, FC Straight Boot, Beige	2
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	1

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS. IT MAY NOT BE DISCLOSED TO ANY OTHER PERSON OR ORGANIZATION WITHOUT WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

Rev	Per	EC#	RELEASE	1/20/2010	-	JS
P	LTR		REVISION RECORD	DATE	DTN	APVD



Restricted To:

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
meters		0 P.L.C	± .
		1 P.L.C	± .
		2 P.L.C	± .
		3 P.L.C	± .
		4 P.L.C	± .

DIN	Cable Assy Configurator		MATERIAL	HEAT TREAT
OK	Jeff Shipe			
APVD	Jeff Shipe		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)			
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1907129	2 of 4	A

8 7 6 5 4 3 2 1

USED ON


THIS DRAWING IS A CONTROLLED DOCUMENT. BFC#D

Part #	L (meters)	L (feet)	LC-Duplex Secure, Rose		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1907129-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	20
4-1907129-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	20
4-1907129-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	20
4-1907129-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	20
4-1907129-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	20
4-1907129-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	20
4-1907129-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	20
5-1907129-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	20
5-1907129-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	20
5-1907129-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	20
5-1907129-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	20
5-1907129-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	20
5-1907129-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	20
5-1907129-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	20
5-1907129-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	20
5-1907129-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	20
5-1907129-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	20
6-1907129-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	20
6-1907129-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	20
6-1907129-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	20
6-1907129-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	20
6-1907129-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	20
6-1907129-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	20
6-1907129-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	20
6-1907129-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	20
6-1907129-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	20
6-1907129-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	20
7-1907129-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	20
7-1907129-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	20
7-1907129-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	20
7-1907129-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	20
7-1907129-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	20
7-1907129-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	20
7-1907129-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	20
7-1907129-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	20
7-1907129-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	20
7-1907129-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	20
8-1907129-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	20


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

A	Rev Per	EC#	RELEASE	1/20/2010	-	JS			
P	LTR	REVISION RECORD		DATE	DIN	APVD			

RESTRICTED TO: 

DIMENSIONS: meters
TOLERANCES UNLESS OTHERWISE SPECIFIED:
9 PLC ± .01
1 PLC ± .01
2 PLC ± .01
3 PLC ± .01
4 PLC ± .01

DIN	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
CHK	Jeff Shipe				
APVD	Jeff Shipe				
NAME	FO C/A - 2 fiber, 62.5/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1907129
SHEET	3 of 4	REV	A		

8 7 6 5 4 3 2 1

D
C
B
A

Label 1

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

A	Rev Per	EC#	RELEASE	1/20/2010	-	JS	
P	LTR		REVISION RECORD	DATE	DIN	APVD	

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± .
1 PLC	± .
2 PLC	± .
3 PLC	± .
4 PLC	± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT
CHK	Jeff Shipe		
APVD	Jeff Shipe	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1907129	4 of 4
			REV
			A

D
C
B
A