
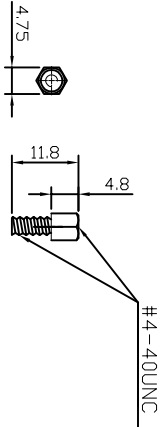

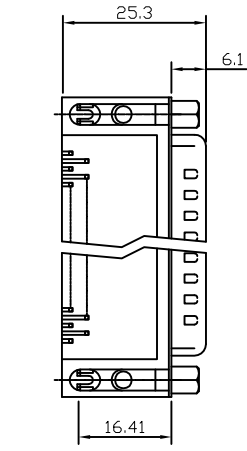
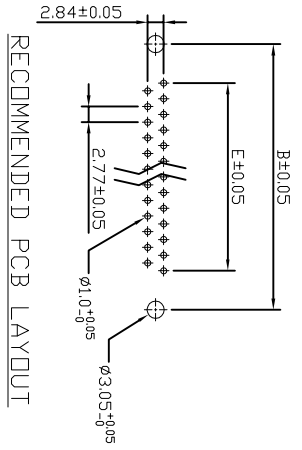


1 2 3 4 5 6 7

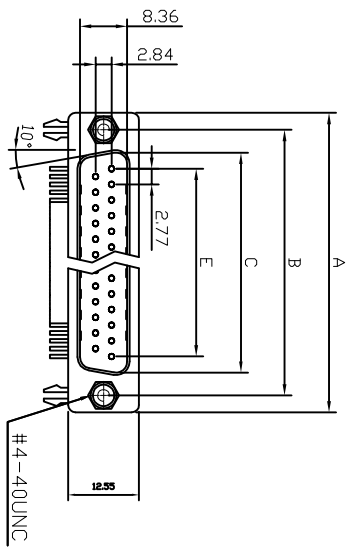

13.84mm Footprint

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

NOTES:
Material
 Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Clinch Nut : Brass, Nickel Plated.
 Boardlock : Brass, Tin Plated.
 Screwlock : Steel, Nickel Plated.
Electrical
 Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 magohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3AMP
 Volatge Rating : 250 VAC/rms 60Hz

RoHS compliant

Scale	1:1								
TOLERANCE									
X.	±0.38								
X.X	±0.25								
X.XX	±0.13								
DIM	TOL								
X.°	±3°								
X.X°	±1.0°	Ⓢ	Drawn						
Angle	TOL	Id.	Modification	Date	Name				

1 2 3 4 5 6 7 TS0016



Customer-No.	Date	Name
	05.11.2013	Winnie
	05.11.2013	Winnie

ASSMANN WSW-No.
 ADSXXA-KG-TASB5
 Drawing-No.
 ASS 6115 CO
 Replace
 rev00
 Sheet

H G F E D C B A