



LTR	REV.	DESCRIPTION	DATE
△	C	ECN # 021007-5 CHANGE PACKING	10/07/02

3050±30mm

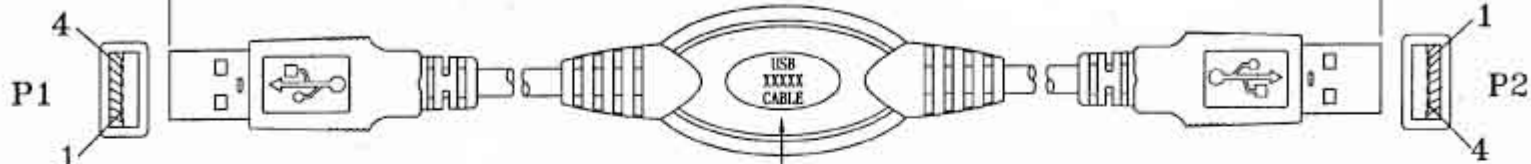

**NOTES:**

1. CABLE:  
UL-2725 24AWG\*2C+28AWG\*1PR+AL-FOIL  
+DRAIN WIRE+BRAID(65%),PVC JACKET.  
COLOR:WHITE(NK-W05) ,OD:4.7±0.15mm .
2. CONNECTORS:  
P1&P2:USB A TYPE MALE GOLD FLASH CONTACT  
NICKEL PLATED SHELL.
3. HOOD:MOLDED TYPE,PVC 45P,COLOR:WHITE(NK-W05)
4. TEST REQUEST:  
<1>.100% OPEN SHORT & MIS WIRE TEST.  
<2>.CONTACT RESISTANCE 3 Ohms MAX.  
<3>.INSULATION RESISTANCE 20M Ohms MIN.
5. PACKING:EACH PC / BLISTER (BLISTER CARD WITH DIGITUS  
ARTWORK PROVIDED BY CUSTOMER) + EAN CODE
6. DRIVE DISK 1PC.
7. EAN-CODE: DN-3002 (4016032117902)  
DN-3003 (4016032117919)

	P1		P2
RED	1	_____	1
WHITE	2	_____	2
GREEN	3	_____	3
BLACK	4	_____	4
		SHELL — BRAID — SHELL	

ENGINEER ISSUE  
OCT 08 2002  
APPROVED: *[Signature]*

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

ASSMANN Electronics	
Title USB DATA LINK CABLE 2.0	
Draw KIKI 10/07	Customer P/N
Check <i>[Signature]</i>	App'd <i>[Signature]</i> Customer E-SSM
Engr <i>[Signature]</i>	Scale NONE Units m/m Third Angle Projection
Dwg No. 170-0770	REV C Sheet 1/1

DWG NO.	NEOSTAR P/N	E-SSM P/N	PRODUCT	PVC MOLD	IC
170-0770-1	USL-1012	DN-3002	1*USB TO 1*USB	USB LINK CABLE	GL620USB
170-0770-2	USL-1162	DN-3003	1*USB TO 16*USB	USB NETLINK CABLE	GL620USB-A