

- CONNECTOR 1: 858-004-203RLS4, MOLDED STRAIGHT HOOD, COLOR BLACK
- CONNECTOR 2: 858-004-203RLS4, MOLDED STRAIGHT HOOD, COLOR BLACK
- WIRE: 24AWG, 4 TWISTED PAIRS, UL2835, FOIL SHIELD, COLOR BLACK, 30V
- CABLE DIAMETER: 0.256 [6.50] ±0.007 [±0.19] PIN DUT :

WIRING SCHEMATIC

CCA-000-MYYR210 01 = 1 METER02 = 2 METERS03 = 3 MFTFRS

**SFF PAGE 3 FOR CABLE SPECIFICATIONS

DO NOT SCALE FROM DRAWING



SHELL

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SI BE REPRODUCED, COPIED OR USE BASIS FOR THE MANUFACTURE OR APPARATUS WITHOUT WRITTEN PE

HONG AIL
HALL NOT
D AS THE
SALE OF
RMISSION

- SHELL

DRAWN: DATE: M. SIGMON 04-20-15 CHECKED: DATE:

	l <i>C</i>		
┤ 	lorC	om	ìΓ


•	n	
	P	С


SCALE: SHEET NTS DWG NO.

3 1

CCA-000-MYYR210

REV

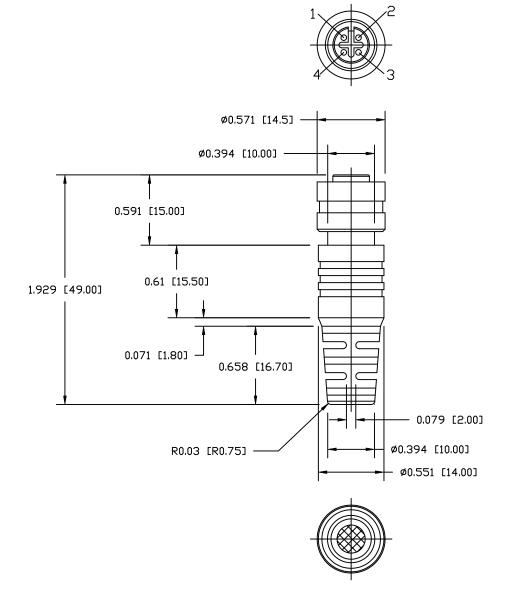

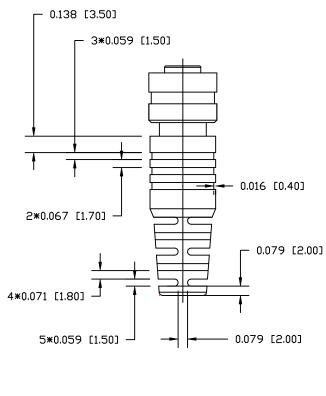

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON	DATE:	04-20-1
CHECKED:	DATE:	

NorComp	
---------	--

SCALE:	SHEET	OF		REV
NTS	1	2	3	2
DWG NO.	CCA-(000-N	1YYR210	

DESCRIPTION: M8 - FEMALE TO FEMALE - 4 POSITION - CABLE ASSEMBLY


ELECTRICAL CHARACTERISTICS

VOLTAGE RATING: 30V TEMPERATURE RATING: 60°C

SPARK TEST: AC-2000V/0.15 sec MIN.
DIELECTRIC STRENGTH: AC-750V/1 sec MIN.

INSULATION RESISTANCE : PE: DC-500V 15000 MOHM/100M MIN. AT 20°C

CONDUCTOR RESISTANCE: 24AWG - 93,2 OHM/KM MAX, AT 20°C

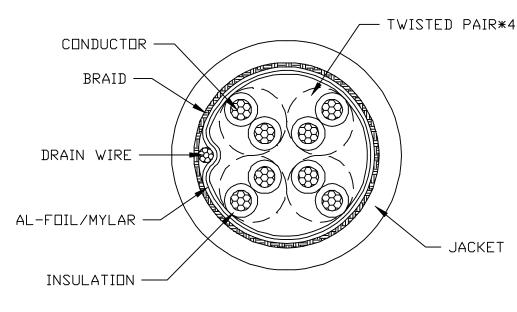

4 1 3 2

COLOR CODE

- 1. BROWN * BROWN/WHITE
- 2. BLUE * BLUE/WHITE
- 3. DRANGE * DRANGE/WHITE
- 4. GREEN * GREEN/WHITE

ROHS COMPLIANT

DO NOT SCALE FROM DRAWING

NTS



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

CHECKED:

DATE: 04-20-15

DATE:

NorComp

	SCALE:
an l	1
ıρ	DWG NO

SHEET 3

3 2

REV

CCA-000-MYYR210