

PS9308L, PS9308L2

2.0 A OUTPUT CURRENT, HIGH CMR, IGBT GATE DRIVE, 6-PIN SDIP PHOTOCOUPLER

Data Sheet R08DS0048EJ0100 Rev.1.00 Aug 31, 2011

DESCRIPTION

The PS9308L and PS9308L2 are optical coupled isolators containing a GaAlAs LED on the input side and a photo diode, a signal processing circuit and a power output transistor on the output side on one chip.

The PS9308L and PS9308L2 are in 6-pin plastic SDIP (Shrink Dual In-line Package). The PS9308L2 has 8 mm creepage distance. The mount area of 6-pin plastic SDIP is half size of 8-pin DIP.

The PS9308L and PS9308L2 are designed specifically for high common mode transient immunity (CMR) and high switching speed. It is suitable for driving IGBTs and MOS FETs.

The PS9308L is lead bending type (Gull-wing) for surface mounting.


The PS9308L2 is lead bending type for long creepage distance (Gull-wing) for surface mount.

FEATURES

- Long creepage distance (8 mm MIN.: PS9308L2)
- Half size of 8-pin DIP
- Peak output current (2.0 A MAX., 1.0 A MIN.)
- High speed switching (t_{PLH} , $t_{PHL} = 0.25 \mu s$ MAX.)
- UVLO (Under Voltage Lock Out) protection with hysteresis
- High common mode transient immunity (CM_H, CM_L = $\pm 25 \text{ kV/}\mu\text{s MIN.}$)
- Embossed tape product: PS9308L-E3, PS9308L2-E3: 2 000 pcs/reel
- · Pb-Free product
- Safety standards
 - UL approved: No. E72422
 - CSA approved: No. CA 101391 (CA5A, CAN/CSA-C22.2 60065, 60950)
 - SEMKO approved: No. 1115598
 - DIN EN60747-5-2 (VDE0884 Part2) approved: No. 40024069 (Option)

APPLICATIONS


- IGBT, Power MOS FET Gate Driver
- Industrial inverter
- IH (Induction Heating)






PACKAGE DIMENSIONS (UNIT: mm)

Lead Bending Type (Gull-wing) For Surface Mount

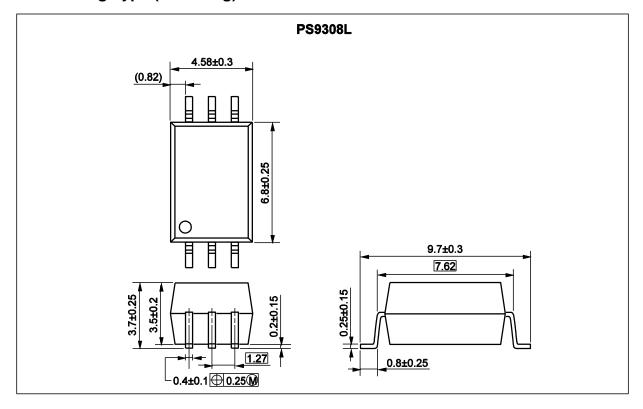

Lead Bending Type (Gull-wing) For Long Creepage Distance (Surface Mount)

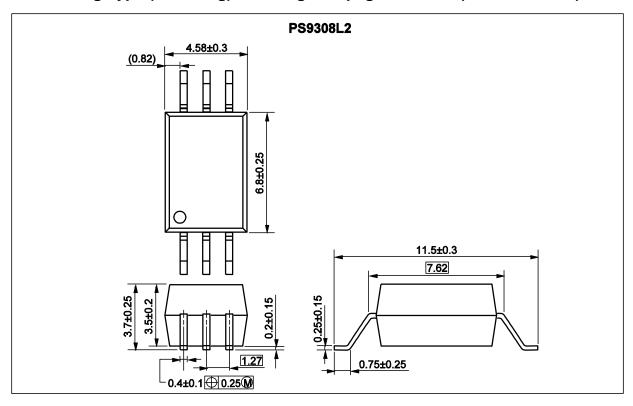




PHOTOCOUPLER CONSTRUCTION

| Parameter | PS9308L | PS9308L2 |
|--------------------------------|---------|----------|
| Air Distance (MIN.) | 7 mm | 8 mm |
| Outer Creepage Distance (MIN.) | 7 mm | 8 mm |
| Isolation Distance (MIN.) | 0.4 mm | 0.4 mm |

MARKING EXAMPLE

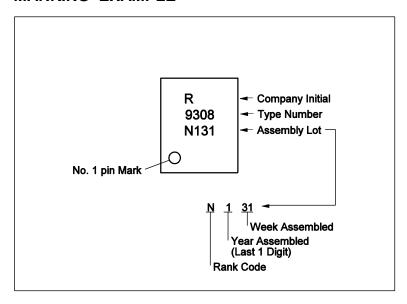



ORDERING INFORMATION

| Part Number | Order Number | Solder Plating Specification | Packing Style | Safety Standard Approval | Application Part Number*1 |
|---------------|------------------|---------------------------------|--------------------------|-----------------------------|---------------------------|
| PS9308L | PS9308L-AX | Pb-Free | 20 pcs (Tape 20 pcs cut) | Standard | PS9308L |
| PS9308L-E3 | PS9308L-E3-AX | (Ni/Pd/Au) | Embossed Tape 2 000 | products | |
| | | | pcs/reel | (UL, CSA, | |
| PS9308L2 | PS9308L2-AX | | 20 pcs (Tape 20 pcs cut) | SEMKO | PS9308L2 |
| PS9308L2-E3 | PS9308L2-E3-AX | | Embossed Tape 2 000 | approved) | |
| | | | pcs/reel | | |
| PS9308L-V | PS9308L-V-AX | | 20 pcs (Tape 20 pcs cut) | DIN EN60747-5-2 | PS9308L |
| PS9308L-V-E3 | PS9308L-V-E3-AX | | Embossed Tape 2 000 | (VDE0884 Part2) | |
| | | | pcs/reel | approved | |
| | | | | (Option) | |
| PS9308L2-V | PS9308L2-V-AX | | 20 pcs (Tape 20 pcs cut) | | PS9308L2 |
| PS9308L2-V-E3 | PS9308L2-V-E3-AX | | Embossed Tape 2 000 | | |
| | | | pcs/reel | | |

Note: *1. For the application of the Safety Standard, following part number should be used.



ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise specified)

| Parameter | | Symbol | Ratings | Unit |
|-------------------------------|--------------------------------------|-------------------------------------|----------------------|---------|
| Diode | Forward Current | I _F | 25 | mA |
| | Peak Transient | I _{F (TRAN)} | 1.0 | Α |
| | Forward Current | | | |
| | (Pulse Width < 1 μ s) | | | |
| | Reverse Voltage | V_R | 5 | V |
| Detector | High Level Peak Output Current *1 | Іон (РЕАК) | 2.0 | А |
| | Low Level Peak Output Current *1 | I _{OL (PEAK)} | 2.0 | А |
| | Supply Voltage | (V _{CC} -V _{EE}) | 0 to 35 | V |
| | Output Voltage | Vo | 0 to V _{CC} | V |
| | Power Dissipation *2 | | 250 | mW |
| Isolation \ | /oltage *3 | BV | 5 000 | Vr.m.s. |
| Total Pow | er Dissipation *4 | P _T | 300 | mW |
| Operating Frequency*5 | | f | 50 | kHz |
| Operating Ambient Temperature | | T _A | -40 to +110 | °C |
| Storage Temperature | | T _{stg} | -55 to +125 | °C |

Notes: *1. Maximum pulse width = 10 μ s, Maximum duty cycle = 0.2%

RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit |
|-------------------------------|----------------------|------|------|------|------|
| Supply Voltage | $(V_{CC}-V_{EE})$ | 15 | | 30 | > |
| Forward Current (ON) | I _{F (ON)} | 7 | 10 | 16 | mA |
| Forward Voltage (OFF) | V _{F (OFF)} | -2 | | 0.8 | V |
| Operating Ambient Temperature | T _A | -40 | | 110 | °C |

^{*2.} Reduced to 4.8 mW/°C at $T_A = 70$ °C or more.

^{*3.} AC voltage for 1 minute at T_A = 25°C, RH = 60% between input and output. Pins 1-3 shorted together, 4-6 shorted together.

^{*4.} Reduced to 5.4 mW/°C at $T_A = 70$ °C or more.

^{*5.} $I_{OH (PEAK)} \le 2.0 \text{ A } (\le 0.3 \mu\text{s}), I_{OL (PEAK)} \le 2.0 \text{ A } (\le 0.3 \mu\text{s})$



ELECTRICAL CHARACTERISTICS (at RECOMMENDED OPERATING CONDITIONS, V_{EE} = GND, unless otherwise specified)

| Parameter | | Symbol | Conditions | MIN. | TYP.*1 | MAX. | Unit |
|-----------|------------------------------|---------------------|--|----------------------|----------------------|------|------|
| Diode | Forward Voltage | V _F | I _F = 10 mA, T _A = 25°C | 1.2 | 1.56 | 1.8 | V |
| | Reverse Current | I _R | $V_R = 3 \text{ V}, T_A = 25^{\circ}\text{C}$ | | | 10 | μА |
| | Input Capacitance | C _{IN} | $f = 1 \text{ MHz}, V_F = 0 \text{ V}, T_A = 25^{\circ}\text{C}$ | | 30 | | pF |
| Detector | High Level Output Current | I _{OH} | $V_0 = (V_{CC} - 4 V)^{*2}$ | 1.0 | 1.5 | | Α |
| | | | $V_0 = (V_{CC} - 15 \text{ V})^{*3}$ | 1.5 | | | |
| | Low Level Output Current | I _{OL} | $V_0 = (V_{EE} + 2.5 \text{ V})^{*2}$ | 1.0 | 1.5 | | Α |
| | | | $V_{O} = (V_{EE} + 15 \text{ V})^{*3}$ | 1.5 | | | |
| | High Level Output Voltage | V _{OH} | $I_0 = -100 \text{ mA}^{*4}$ | V _{CC} -3.0 | V _{CC} -1.3 | | V |
| | Low Level Output Voltage | V _{OL} | I _O = 100 mA | | 0.1 | 0.5 | V |
| | High Level Supply Current Ic | | $I_F = 10 \text{ mA}, V_O = \text{open}$ | | 1.2 | 2.0 | mA |
| | Low Level Supply Current | I _{CCL} | $V_F = 0$ to 0.8 V, $V_O = open$ | | 1.2 | 2.0 | mA |
| | UVLO Threshold | $V_{\text{UVLO+}}$ | $V_0 > 5V$, $I_F = 10 \text{ mA}$ | 10.8 | 12.3 | 13.4 | V |
| | | V _{UVLO-} | | 9.5 | 11.0 | 12.5 | |
| | UVLO Hysteresis | UVLO _{HYS} | | 0.4 | 1.3 | | |
| Coupled | Threshold Input Current | I _{FLH} | $I_{O} = 0 \text{ mA}, V_{O} > 5 \text{ V}$ | | 1.8 | 5.0 | mA |
| | $(L \rightarrow H)$ | | | | | | |
| | Threshold Input Voltage | V_{FHL} | $I_{O} = 0 \text{ mA}, V_{O} < 5 \text{ V}$ | 0.8 | | | V |
| | $(H \rightarrow L)$ | | | | | | |

Notes: *1. Typical values at $T_A = 25$ °C.

^{*2.} Maximum pulse width = 50 μ s, Maximum duty cycle = 0.5%.

^{*3.} Maximum pulse width = 10 μ s, Maximum duty cycle = 0.2%.

^{*4.} V_{OH} is measured with the DC load current in this testing. (Maximum pulse width = 2 ms, Maximum duty cycle = 20%)




SWITCHING CHARACTERISTICS (at RECOMMENDED OPERATING CONDITIONS, V_{EE} = GND, unless otherwise specified)


| Parameter | Symbol | Conditions | MIN. | TYP.*1 | MAX. | Unit |
|--|------------------------------------|---|------|--------|------|----------------|
| Propagation Delay Time $(L \rightarrow H)$ | t _{PLH} | $R_g = 10 \Omega, C_g = 10 nF,$ | | 0.08 | 0.25 | μS |
| Propagation Delay Time $(H \rightarrow L)$ | t _{PHL} | f = 10 kHz, | | 0.10 | 0.25 | μS |
| Pulse Width Distortion (PWD) | t _{PHL} -t _{PLH} | Duty Cycle = 50% ^{*2} , | | 0.02 | 0.1 | μS |
| Propagation Delay Time (Difference Between Any Two Products) | t _{PHL} -t _{PLH} | I _F = 10 mA | -0.1 | | 0.1 | μs |
| Rise Time | t _r | | | 50 | | ns |
| Fall Time | t _f | | | 50 | | ns |
| Common Mode Transient Immunity at High Level Output | CM _H | $T_A = 25$ °C, $I_F = 10$ mA, $V_{CC} = 30$ V, $V_{CM} = 1.5$ kV, $V_{O (MIN.)} = 26$ V | 25 | | | kV/μs |
| Common Mode Transient Immunity at Low Level Output | CM _L | $T_{A} = 25^{\circ}C, I_{F} = 0 \text{ mA},$ $V_{CC} = 30 \text{ V}, V_{CM} = 1.5 \text{ kV},$ $V_{O \text{ (MAX.)}} = 1 \text{ V}$ | 25 | | | kV/ <i>μ</i> s |

Notes: *1. Typical values at $T_A = 25$ °C.

^{*2.} This load condition is equivalent to the IGBT load at 1 200 V/25 A.

TEST CIRCUIT

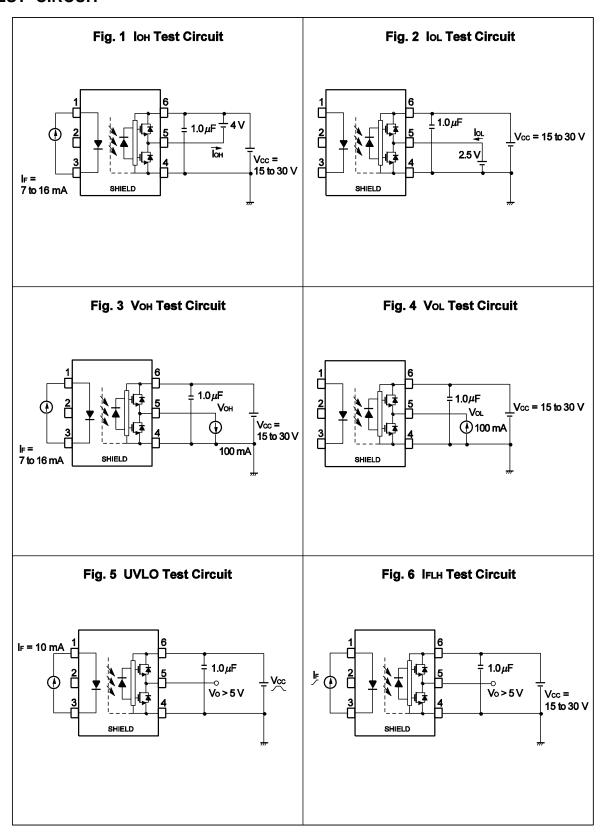

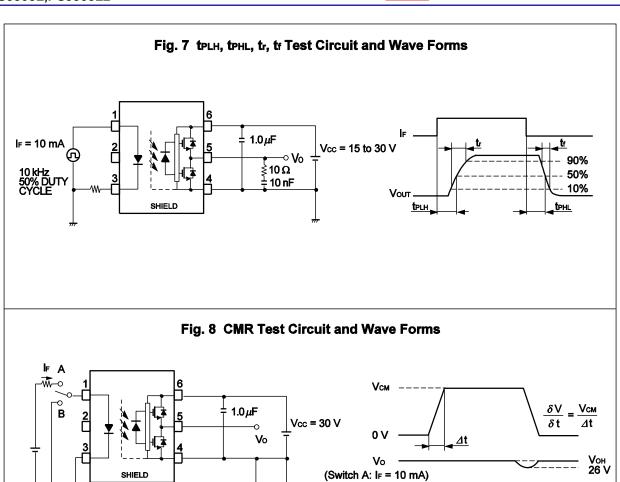

Vo ·


(Switch B: IF = 0 mA)


ᡚ

 $V_{CM} = 1.5 \text{ kV}$




TAPING SPECIFICATIONS (UNIT: mm)

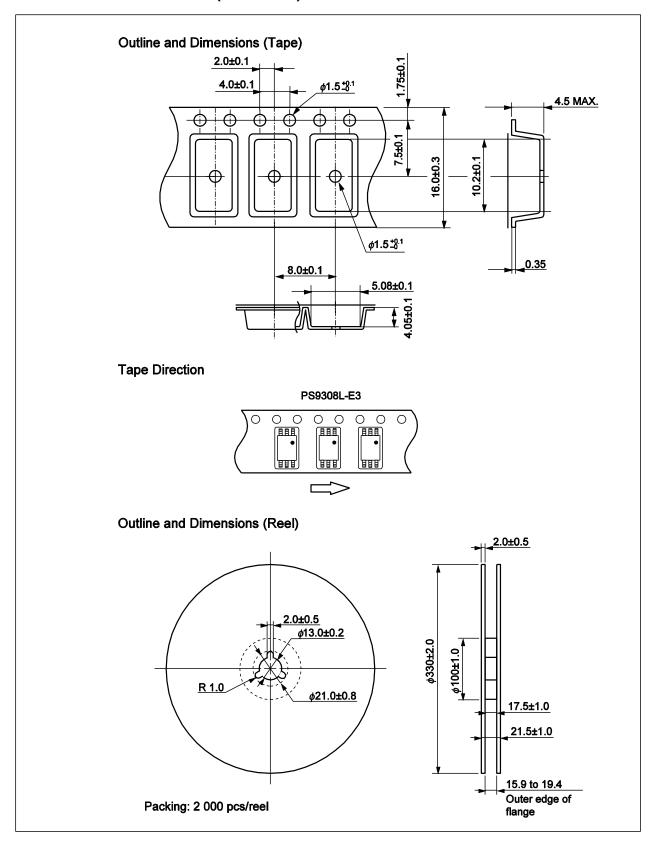

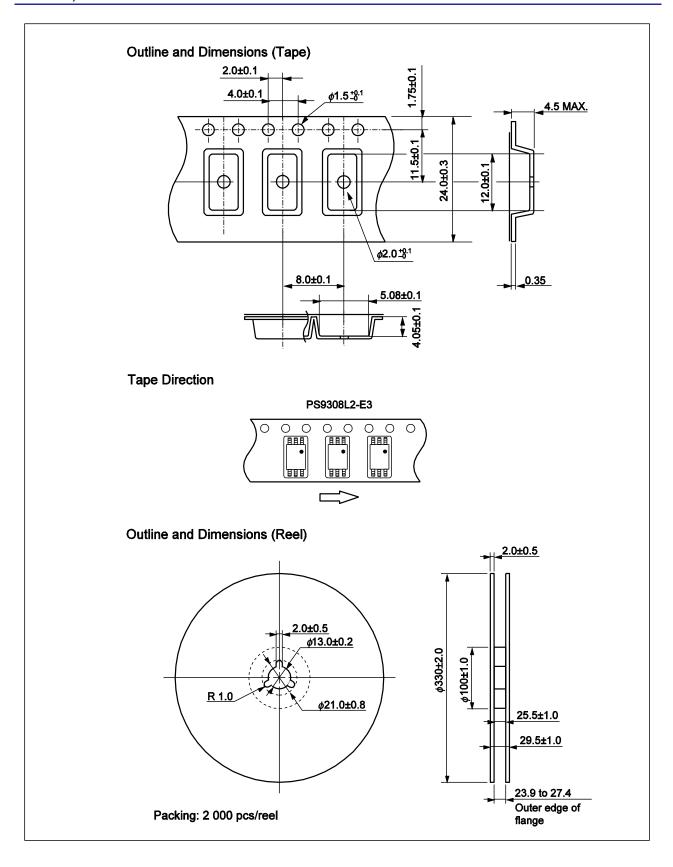



RECOMMENDED MOUNT PAD DIMENSIONS (UNIT: mm)

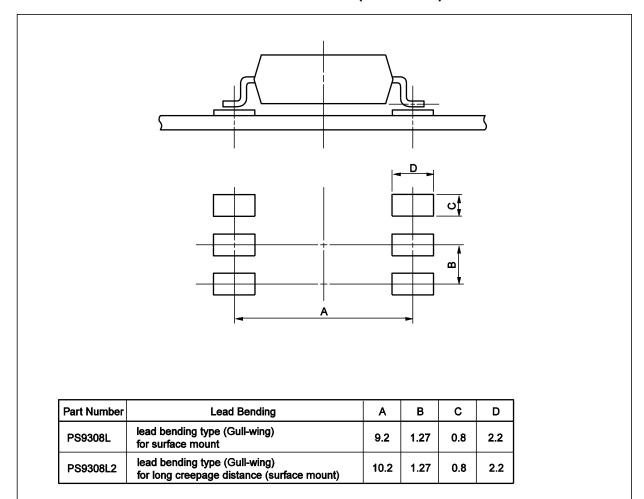

NOTES ON HANDLING (UNIT: mm)

- 1. Recommended soldering conditions
 - (1) Infrared reflow soldering

• Peak reflow temperature 260°C or below (package surface temperature)

Time of peak reflow temperature 10 seconds or less
 Time of temperature higher than 220°C 60 seconds or less


• Time to preheat temperature from 120 to 180°C 120 ± 30 s

• Number of reflows Three

Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

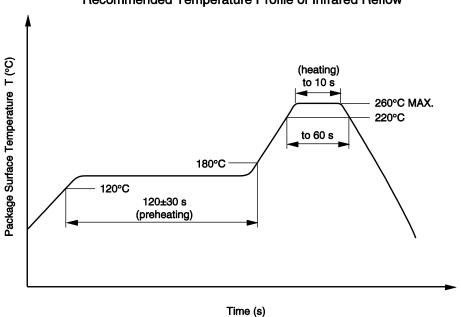

(2) Wave soldering

• Temperature 260°C or below (molten solder temperature)

• Time 10 seconds or less

• Preheating conditions 120°C or below (package surface temperature)

Number of times
 One (Allowed to be dipped in solder including plastic mold portion.)

Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine

content of 0.2 Wt% is recommended.)

(3) Soldering by Soldering Iron

Peak Temperature (lead part temperature) 350°C or below
 Time (each pins) 3 seconds or less

Flux Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead

(4) Cautions

Fluxes Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.



2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

USAGE CAUTIONS

- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. Board designing
 - (1) By-pass capacitor of more than 1.0 μ F is used between V_{CC} and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
 - (2) When designing the printed wiring board, ensure that the pattern of the IGBT collectors/emitters is not too close to the input block pattern of the photocoupler.

 If the pattern is too close to the input block and coupling occurs, a sudden fluctuation in the voltage on the IGBT
 - output side might affect the photocoupler's LED input, leading to malfunction or degradation of characteristics. (If the pattern needs to be close to the input block, to prevent the LED from lighting during the off state due to the abovementioned coupling, design the input-side circuit so that the bias of the LED is reversed, within the range of the recommended operating conditions, and be sure to thoroughly evaluate operation.)
 - (3) Pin 2 (which is an NC*1 pin) can either be connected directly to the GND pin on the LED side or left open. Unconnected pins should not be used as a bypass for signals or for any other similar purpose because this may degrade the internal noise environment of the device.
 - Note: *1. NC: Non-Connection (No Connection).
- 3. Make sure the rise/fall time of the forward current is 0.5 μ s or less.
- 4. In order to avoid malfunctions, make sure the rise/fall slope of the supply voltage is $3 \text{ V}/\mu\text{s}$ or less.
- 5. Avoid storage at a high temperature and high humidity.



SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

| Parameter | Symbol | Spec. | Unit |
|--|------------------|------------------|------------|
| Climatic test class (IEC 60068-1/DIN EN 60068-1) | | 40/110/21 | |
| Dielectric strength | | | |
| maximum operating isolation voltage | U_{IORM} | 1 130 | V_{peak} |
| Test voltage (partial discharge test, procedure a for type test and random test) | U_pr | 1 695 | V_{peak} |
| $U_{pr} = 1.5 \times U_{IORM.}, P_d < 5 pC$ | | | |
| Test voltage (partial discharge test, procedure b for all devices) | U_pr | 2 119 | V_{peak} |
| $U_{pr} = 1.875 \times U_{IORM.}, P_d < 5 pC$ | | | |
| Highest permissible overvoltage | U_TR | 8 000 | V_{peak} |
| Degree of pollution (DIN EN 60664-1 VDE0110 Part 1) | | 2 | |
| Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303 Part 11)) | CTI | 175 | |
| Material group (DIN EN 60664-1 VDE0110 Part 1) | | III a | |
| Storage temperature range | T _{stg} | -55 to +125 | °C |
| Operating temperature range | T _A | -40 to +110 | °C |
| Isolation resistance, minimum value | | | |
| $V_{IO} = 500 \text{ V dc at } T_A = 25^{\circ}\text{C}$ | Ris MIN. | 10 ¹² | Ω |
| V _{IO} = 500 V dc at T _A MAX. at least 100°C | Ris MIN. | 10 ¹¹ | Ω |
| Safety maximum ratings (maximum permissible in case of fault, see thermal | | | |
| derating curve) | | | |
| Package temperature | Tsi | 175 | °C |
| Current (input current I _F , Psi = 0) | Isi | 400 | mA |
| Power (output or total power dissipation) | Psi | 700 | mW |
| Isolation resistance | | | |
| $V_{IO} = 500 \text{ V dc at } T_A = Tsi$ | Ris MIN. | 10 ⁹ | Ω |

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 - Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
- 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

Revision History

PS9308L,PS9308L2 Data Sheet

| | | Description | | |
|------|--------------|-------------|----------------------|--|
| Rev. | Date | Page | Summary | |
| 1.00 | Aug 31, 2011 | _ | First edition issued | |